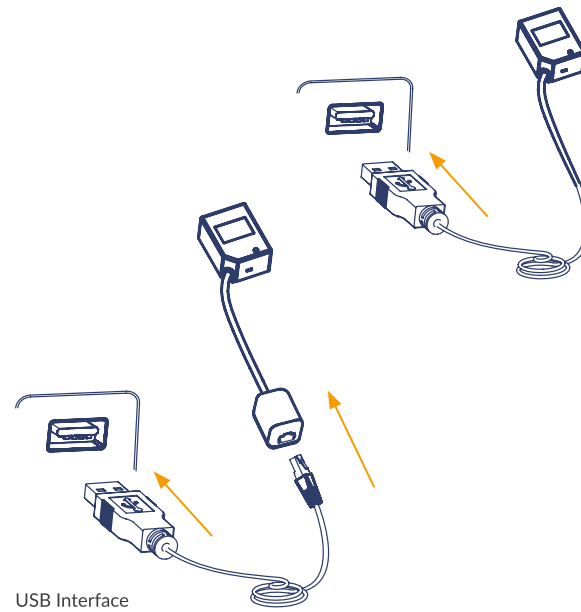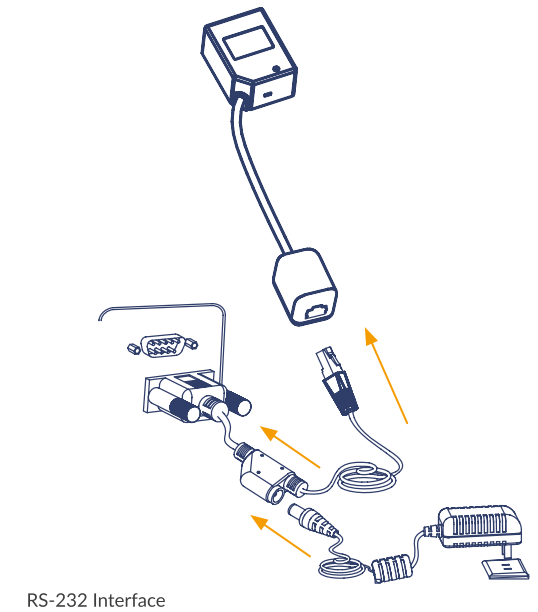LED

Logo

Lens

Focus lamp

USB Interface

RS-232 Interface

Note: The host refers to a PC, POS, or other terminal equipped
with USB or RS-232 interface.

1

2

3

Scanning instructions

Sense scan mode (default):

Step 1: Connect the scanner to a host with the cable.
Then the scanner will be powered on.

Step 2: Position the barcode on the mobile phone screen or paper in
the center of the scan window.

Step 3: For a good read, the LED on the scanner will flash.

Troubleshooting

When the scanner is not working, please:

1 Ensure that all cable connections are secure.

2 Ensure that the screen backlight is on when reading digital
barcodes off a mobile phone and that the barcode is not defaced
when reading it on paper. Wrinkled, soiled, or torn barcodes might
be unreadable.

3 Ensure that the barcode type is enabled.

Visit our website
newland-id.com

Newland
SCANNING MADE SIMPLE

FM100

4

Quick Start Guide V1.0